



Building tomorrow



ARDEX
Price List
May 2026

Extract from the general conditions of sale

PRICE LIST

This price list supersedes and voids all previous versions.

The listed prices exclude VAT and transportation costs.

The listed prices are effective as from May 1st, 2026 and remain subject to change without prior notice by ARDEX CEMENTO, S.A.

These prices apply to products made available in our factory in Les Franqueses del Vallès (Barcelona).

ORDERS, SHIPPING AND DELIVERY TIMES

Sales of 5 kg bags of joints are subject to a minimum of 1 box per sale (containing 4 units).

The minimum sale of silicone and ADIPOX is 1 box.

Orders must be confirmed in writing, via email.

Orders under 300 € must be paid in full at time of purchase.

Shipping is the responsibility and at the risk of the purchaser, even when shipping or freight costs are borne by ARDEX CEMENTO, S.A.

The value of packaging is included in the price. Packaging is not returnable.

The end-customer remains responsible for the correct handling and disposal of all received packaging.

First additional provision of Law 11/1997.

The delivery times are counted from receipt of formal written confirmation of the order, as follows:

a) 5 working days for national products (ex-works).

b) 10 working days for imported products (ex-works).

(Please contact our Customer Support Department).

We have an Urgent service within 24 hours from the date the order is dispatched, with an extra cost of €45/pallet for non-ADR material (with prior confirmation of the service)

GUARANTEE

ARDEX CEMENTO, SA takes responsibility for the quality of its products. The recommendations of use given are based on tests and practical experience, as set out in the Product Technical Sheets. ARDEX CEMENTO, S.A. will not be held responsible for any product or application in case of dosage or application other than as described and recommended. The Company's liability is limited, in any event, to cases where there is a recognised defect in the product.

For any questions about this product, please contact ARDEX CEMENTO, S.A. Technical Department. [Tel. +34 93 846 62 52].

COMPLAINTS - REQUEST FOR RETURNS

Complaints will only be considered where made in writing and no later than ten days following receipt of the products.

Product returns must be authorised by ARDEX CEMENTO, SA, and delivered to our factory, with shipping at the purchaser's expense.

Only goods received in good condition and on full pallets will be accepted, subject to a 35% discount applied to their value.

Returns of products occurring more than 30 days following their delivery to the purchaser will not be accepted.

JURISDICTION

All purchases, whatever their place of delivery, are considered as occurring at the registered office of ARDEX CEMENTO, S.A.

By confirming their order, the customer agrees to submit to the jurisdiction of the Judges and Courts of Barcelona and expressly waives any other jurisdiction.

PRODUCT	page	PRODUCT	page	PRODUCT	page	PRODUCT	page
Repair Mortars		Floor Leveling Compounds		Tile Adhesives		Industrial Flooring	
CEMGROUT	4	ARDEX K 55S	8	ARDEX 4x4 CREAM	12	ARDEX R70PE	17
REP MUR	4	ARDEX K 301	8	ARDEX 4x4	12	ARDEX R90P	17
REP MUR R	4	ARDEX IFS	8	ARDEX 4x4 FAST	12	ARDEX PRIMER E	17
REP MUR F	4	ARDEX IFS MIX	8	ARDEX X7G FLEX	12	ARDEX R40E	17
REP MUR AR	4	ADICEM SF	8	ARDEX X7W	12	ARDEX R50ES	17
REP MUR AR FAST	4	ARDEX CL100	8	ARDEX X7W PLUS	12	ARDEX R15P	17
REP MUR AR FLOW	4	ARDEX K 14 MIX	8	COLAFIX 8x8	12	ARDEX R15P AB+	17
ARDEX AM 100	4	ADICEM FLOW	9	ARDEX S22	12	ARDEX R6E	17
ARDEX A45	4	ADICEM TR	9	ARDEX N23W	13	ARDEX DGR	17
ARDEX A46	5	NIVELCEM PLUS	9	ARDEX X32	13	ARDEX RTC	17
ARDEX CD	5	ARDITEX NA	9	ARDEX X80	13	ARDEX R65P	17
PAVIDUR	5	ARDEX TP50	9	ARDEX X80S	13	ADI COAT PRIMER	17
ARDEX FIX	5	ARDEX E25	9	ARDEX WA ADHESIVO	13		
ADILATEX	5			ARDEX PMO 560	13	Structural Reinforcement	
ARDEX E100	5			DESINCRUSTADOR ADI 90	13	ADICARBON 240	18
		Waterproofing		ARDEX E 90	13	ADIPOX EP55	18
Specialty Cements		HUMISTOP	10			ADITAPE 150	18
ARDEX A35	5	HUMISTOP FLEX	10	Tile Grouts & Silicones		ADITAPE 200	18
ARDEX A38	5	HUMISTOP FLEX 1C	10	ARDEX BS	14	ADIPOX EP220	18
ARDEX A38 MIX	5	HUMISTOP HWO	10	ARDEX FS FLEX	14		
ARIDO 35/38	5	HUMISTOP PLUG	10	ARDEX G9S FLEX	14		
ADISOL PLUS	5	HUMISTOP WP170	10	ARDEX JK Especial piscinas	14		
ARDEX A18	5	ARDEX 8+9	10	ARDEX WA JUNTA	14		
		ARDEX 7+8	10	ARDEX ST	15		
		ADIMESH 21	10	ARDEX SE	15		
		ADIMESH 55	10	ARDEX SC-MATT	15		
Primers & Bondings Agents		ARDEX SK100W	11	ARDIFLEX GRIS	15		
ARDEX P 51	6	ARDEX SK12	11	ARDEX CA 20P	15		
ARDEX P 52	6	ARDEX FPO S DT	11	ARDEX RG Cleaner	15		
ARDEX P4 READY	6	PROTECER I 10	11				
ARDEX P82	6	PROTECER W 120	11	Plasters & Renders			
ARDEX PU30	6	PROTECER IC	11	ARDEX W820 Super finish	16		
ARDEX EP 2000	6	ISOLCAP FEIN 300	11	ARDEX A 828 LEMON	16		
ARDEX DPM 1C	6			ARDEX W 600	16		
ADIPOX PLUS	7			ARDEX R1	16		
ADI PASIVANT	7			ARDEX F11	16		
WAKOL PS205	7			ARDEX F5	16		
ADIPOX E ANCLAJES	7			ARDEX B12	16		
CONSOLIDANTE ADI 600	7			REVOPLAST	16		
ARISIL	7			ARDEX R4 RAPID	16		
				ARDEX RF	16		

Repair Mortars

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
CEMGROUT	50449	Fluid mortar without shrinkage and high resistance. Anchoring metal parts, settlement of walls, columns, etc. Indoors and outdoors. Certified according to UNE EN 1504-6. Fire performance A1.	1,9 kg/m ² /mm	25	1125	1,20	30,00
REP MUR	50461	Fast-setting thixotropic repair mortar for the reconstruction of edges, balconies, ledges and ornamental elements. Indoors and outdoors.	1,5 kg/m ² /mm	25	1125	1,44	36,00
REP MUR R	32140	Ultra-fast setting repair mortar (<5 min). Non-shrink. Suitable for anchoring profiles, wood elements, door frames, etc., into masonry walls. Ideal for edge marking prior to wall rendering. Excellent adhesion. Thixotropic. Chloride-free.	1,7 kg/m ² /mm	25	1125	1,28	32,00
REP MUR F	50463	Fibre-reinforced thixotropic structural repair mortar. High strength. Thickness from 5 to 70 mm. Crack-free. Filling and finishing in repairs. Indoors and outdoors. Added corrosion inhibitors. Certificate UNE EN 1504-3:R3.	1,45 kg/m ² /mm	25	1125	1,33	33,25
REP MUR AR	20112	Fibre-reinforced thixotropic structural repair mortar. High strength. Thickness from 5 to 70 mm. Crack-free. Filling and finishing in repairs. Indoors and outdoors. Especially suited to aggressive environments. Anti-corrosion mortar. Certificate UNE EN 1504-3:R4. Certified according to UNE EN 1504-7. EC1Plus very low emissions.	1,8 kg/m ² /mm	25	1125	1,33	33,25
REP MUR AR FAST	46017	High-strength, fast-setting thixotropic structural repair mortar. For the repair of concrete structures, filling of voids and cracks, spalling in columns, slab edges, etc., where high mechanical strength is required in a short period of time. Repair of structural elements in aggressive environments. Suitable for interior and exterior use. Classified as R4 according to UNE EN 1504-3. Certified according to UNE EN 1504-7. EC1PLUS very low emission.	1,8 kg/m ² /mm	25	1125	1,40	35,00
REPMUR AR FLOW	24780	Fluid repair mortar with incorporated fibers. For structural repairs by pouring. High strength. Thickness from 6 to 60 mm. Crack-free. Suitable for exterior and interior use. Formulated with corrosion inhibitors. Certified according to UNE EN 1504-3: R4. Fire performance: Class A1.	1,9 kg/m ² /mm	25	1125	1,49	37,25
ARDEX AM 100	56173	Rendering and levelling mortar ready to receive tiles in 2 hours. Applicable in thicknesses of 5 to 30 mm. Indoors and outdoors. Certificate EN 13813: CT C7 F3. EC1Plus very low emission.	1,4 kg/m ² /mm	25	1000	3,25	81,25
ARDEX A45	50499	Very fast setting, fine mortar to repair concrete (repair of step edges, pillars, balconies and fillers for all types of holes). Can be covered in 45 minutes. Indoors. Certificate EN 13813: CT C40 F7. Ardurapid® effect. EC1 very low emissions.	1,6 kg/m ² /mm	25	1125	2,49	62,25

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX A46	50500	Fast-drying fine mortar for repairing concrete and mortars (work on step edges, pillars, balconies and filling of all types of holes). Interior/ Exterior. Certificate EN 13813: CT C20 F5. ARDURAPID® Plus effect. EC1Plus very low emission. Fire performance A1/A1(fi).	1,4 kg/m ² /mm	25	1125	2,87	71,75
ARDEX CD	50491	Resurface worn and spalled concrete to provide a "new concrete" finish. Walkable after 3 hours. Indoors and outdoors. Max thickness approx. 5 mm. Decorative.	1,34 kg/m ² /mm	25	1125	3,42	85,50
PAVIDUR	50471	Fluid repair mortar without shrinkage and very fast-setting. For urgent repairs. High resistance. Repairs chips in flooring. Application temperature range -20°C to +30°C. Can be walked over within 30 minutes. Indoors and outdoors.	2 kg/m ² /mm	25	1125	3,59	89,75
ARDEX FIX	50591	Repair of all types of substrates of any kind. Multipurpose. Dry in 30 minutes. Also acts as a primer. Indoors. Certificate EN 13813: CT C20 F7. Ardurapid® effect.	1,15 kg/m ²	5 (4 u. minimum)	540	9,54	190,80
ADILATEX	50466	Acrylate admixture for based mortars and renders on concrete. Interior and exterior use.	1,25-5 kg	5	360	8,62	43,10
	50467		25 kg mortar	25	600	8,38	209,50
ARDEX E100	59280	Acrylate additive for improving of cement-based mortars and plasters on concrete. Indoors and outdoors.	0,06-0,22 kg/m ² /mm	5	360	19,97	99,85

Special Cements

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX A35	50497	Fast drying cement to produce cement screeds according to UNE-EN 13813 (class CT C35 F6 to CT C45 F7) . Pumpable. Walkable after 3 hours and can be covered after 24 hours. Indoor. Ardurapid® effect. Fire performance A1 (fi). EC1Plus very low emission.	310 kg/m ² (mixing ratio 1:5)	25	1125	2,76	69,00
ARDEX A38	50498	Ultra rapid drying cement for internal and external screeds according to UNE-EN 13813 (class CT C35 F4 to CT C45 F5) . Pumpable. Walkable after 4 hours, and can be covered after 48 hours. Indoor-outdoor. Fast setting with Ardurapid® Plus Effect. Fire performance A1(fi). EC1Plus very low emission.	Aprox. 310 kg/m ² (mixing ratio 1:5)	25	1125	2,82	70,50
ARDEX A38 MIX	38125	Premixed cement with sand for screed applications. Walkable after 4 hours and ready for covering after 48 hours. Interior and exterior use. Fast-drying, with Ardurapid® Plus effect. Certificate EN 13813:CT C40 F5. Fire performance A1(fi). EC1Plus very low emission.	2,2 kg/m ² /mm	25	1000	2,20	55,00
ÁRIDO 35/38	20318	Washed quartz sand with granulometry specially designed to achieve maximum compactness and resistance to compression. 0-8 mm.	(depending on use)	30	1260	0,77	23,10
ADISOL PLUS	22773	Fast setting and initial strength cement for internal and external screeds according to UNE-EN 13813 (class CT C35 F5) . Quick entry into operation - traffic after 12 hours. Ceramics can be laid after 24 hours, natural stone after 2 days and PVC adhesion, carpet, etc. after 4 days. Complies with EN13813: CT-C35-F5.	2,5 kg/m ² /cm (mixing ratio 1:7)	25	1125	1,33	33,25
ARDEX A18	37630	Bonding slurry for executing of bonded screeds of ARDEX A35, ARDEX A38 or ARDEX A38MIX. One-component. Long open time and high adhesive strength. EC1Plus very low emissions.	1,5 kg/m ² (1,5 thickness layer)	25	1125	2,00	50,00

Primers and Bonding Agents

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX P51	59180			1 box (10 Uts) Mini Sale, 1 Box	340	28,96	28,96
	50502	Centrated water-based primer and bonding agent for sealing all types of porous substrates. Prevent bubbles and dehydration of mortars on flooring. Solvent free. Indoor-outdoor.	20-300 g/m ²	10	330	13,54	135,40
	50503			20	320	13,30	266,00
ARDEX P52	59185	Primer, bonding agent and pore sealer for porous and non-porous substrates. Indoor use. EC1plus very low emissions.	30-300 g/m ²	5	360	18,13	90,65
ARDEX P4 READY	39007			2	360	15,84	31,68
	48367	Primer and mono-component bonding agent. Solvent free. Ideal as a primer on both porous and non-porous substrates. Interior-Exterior use.	100-200 g/m ²	4	360	13,76	55,04
	49175			8	520	12,23	97,84
ARDEX P82	59200	Water-based epoxy primer and bonding agent. Solvent free. Ideal as a primer on all types of dense, smooth and waterproof substrates. Indoor use.	100-200 g/m ²	Kit 3+3 Ut (1 box 2 kits) Mini sale, 1 Box	432	22,37	134,22
ARDEX PU30	22390	Mono-component polyurethane resin, substrate primer and strengthener. EC1Plus very low emissions.	100-300 g/cm ² (according to application type)	11	660	30,74	338,14
ARDEX EP 2000	60170			1 kg (1 Box 10 Ut) Mini sale	340	62,15	62,15
	8006011	Epoxy primer with rising damp blocking properties. For filling cracks in concrete flooring. Adheres to construction materials. Solvent free. Certificate EN 13813:SR C70 F20 B2.0. Fire performance BfIS1. EC1Plus very low emission.	300-600 g/m ²	10	240	33,15	331,50
	8005993			25	500	31,12	778,00
ARDEX DPM 1C	8001603	Primer. Blocks rising damp with subsequent application of Ardex self-levelling mortars. Damp Proof Membrane. Can be applied on substrates containing up to 98% RH. Single layer. Certificate UNE EN 1504-2.	600 g/m ²	20 Kits A+B	480	30,40	608,00

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ADIPOX PLUS	8005341	Epoxy adhesive specially designed for bonding new and old concrete. High workability. Certificate UNE EN 1504-4.	0,5-1 kg/m ²	5	225	25,02	125,10
ADI PASIVANT	50696	One component passivating cementitious mortar for concrete reinforcement. Bonding bridge between concrete and ARDEX repair mortars. Mix only with water. Easy to apply. Indoor and outdoor use.	Armatures protec. 1,3 kg/m ² /layer Bonding agent 2 kg/m ² /layer	5	360	4,48	22,40
WAKOL PS 205	41294	Silicate resin two components of modified polymer for rapid hardening. Repairing cracks in screeds and bonding nails, metal profiles, and natural or synthetic stone to absorbent and non-absorbent substrates indoors.	200-300 g/cm ² (depending on width and depth)	2 uts. 300 ml	18792	17,57	17,57
ADIPOX E Anclajes	25036	Resin-based epoxy-acrylate adhesive for fixing and anchoring. Styrene free. Applicable with silicone gun (300cc). Certificate ETA-19/0186 and ETA-18/1004.	1,8 g/cm ²	cartridge 300cc	1 Box 12 cartridges Minimal sale (96 boxes/pallet)	17,10	205,20
CONSOLIDANTE ADI 600	50396	Strengtheners for sandstones, granites and non-compacted mortars. High degree of penetration. Indoor and outdoor use.	180-350 g/m ²	10	400 L	16,63	166,30
ARISIL	19771	0,7 mm quartz sand for saturation of epoxy primers. *Approximate consumption to achieve saturation of epoxy primer.	3 kg/m ²	25	1250	0,80	20,00

Floor Levelling Compounds

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX K55S	44840	Self-levelling mortar, ready for covering after 60 minutes. Applicable in layers from 1 to 10 mm. For interior use. With Ardurapid® effect. Certified EN 13813: CT C40-F10. Fire performance A2flS1. EC1Plus very low emission.	1,4 kg/m ² /mm	20	1000	4,10	82,00
ARDEX K301	53145	Special self-levelling mortar for exteriors and damp areas. Thickness from 2 to 20 mm. Can be walked on after 3 hours. Certificate EN 13813: CT C30 F7 A22.	1,6 kg/m ² /mm	25	1000	2,76	69,00
ARDEX IFS	50529	Self-levelling mortar for industrial applications ready to receive coatings after 24 hours. Special designed for industrial buildings, warehouses, car parks, etc. Applicable from 5 to 10 mm thickness. High resistance. Indoor use. Ardurapid® effect. Certificate EN 13813 CT C30 F10 A22. Fire performance A2flS1. EC1 very low emissions.	1,65 kg/m ² /mm	25	1125	2,76	69,00
ARDEX IFS MIX	14077	Self-levelling mortar especially designed to level industrial flooring in layers of 8 to 50 mm. Indoors use. Ardurapid® effect. Certificate EN 13813: CT C25 F7 A15. Fire performance A2flS1.	1,7 kg/m ² /mm	25	1125	2,10	52,50
ADICEM SF	23604	Cement-based industrial self-levelling mortar. Thicknesses of 5 to 15 mm. No cracks even in a thick layer. Walkable after 3 hours. Pumpable. Highly resistant. Certificate EN 13813 CT C40 F10 A22.	1,65 kg/m ² /mm	25	1125	2,00	50,00
ARDEX CL100	46332	Self-leveling mortar (1-10mm) for covering, leveling, and smoothing interior concrete pavements, cement screeds, anhydrite, calcium sulfate, poured asphalt, or magnesite. High workability. Walkable after 2 hours. Certified EN 13813: CT C30-F7. EC1Plus very low emission.	1,5 kg/m ² /mm	25	1125	1,76	44,00
ARDEX K14 MIX	50549	Self-levelling mortar for 8 to 50 mm thickness. Ready to receive floorcoverings after 24 hours. No cracks. Indoor use. Ardurapid® effect. Certificate EN 13813: CT C30 F7. EC1 very low emissions.	1,8 kg/m ² /mm	25	1125	1,66	41,50

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ADICEM FLOW	23603	Cement-based self-levelling mortar for large surfaces. For thicknesses from 1 to 15 mm. Can be walked on after 2-3 hours. Prepares the surface to be coated with a single layer. Does not crack in layers of up to 15 mm. Pumpable indoor use. Certificate EN 13813: CT C35 F7. EC1Plus very low emissions.	1,6 kg/m ² /mm	25	1125	1,52	38,00
ADICEM TR	41738	Fibre-reinforced self-levelling mortar. For thicknesses from 5 to 30 mm. Walkable after 3 hours. Indoors. Certified acc. EN 13813: CT C30 F7 AR 0.5.	1,8 kg/m ² /mm	25	1125	1,42	35,50
NIVELCEM PLUS	50469	Self-levelling mortar, can be walked on after 3 hours. Applicable between 3 and 15 mm. Indoor use. Certificate EN 13813: CT C20 F7.	1,8 kg/m ² /mm	25	1125	1,28	32,00
ARDITEX NA	50543	Ultra rapid setting latex subfloor levelling and smoothing Compound - No Ammonia. Applicable on any substrate. Walk on after 2 hours. Applicable from 0 to 12 mm. Indoor use. Certificate EN 13813: CT C12 F4. Fire performance A2fSL.	1,65 kg/m ² /mm	Comp. A 20	1000	1,87	37,40
	50493			Comp. B 4,8	240	5,07	24,34
ARDEX TP50	59177	Perimeter tape. Self-adhesive foam tape for avoiding acoustic bridges during substrate levelling work as well as for the laying of tile, slab, natural stone and cast stone coverings. Ensures ventilation and prevents acoustic bridges.	—	25m x 50 mm. roll (thickness 5 mm) 4 rolls per box	72 Rolls	88,30	353,20
ARDEX E25	59240	Synthetic dispersion resin for reinforcement of self-levelling mortars. Improves flexibility and resistance to wear. Indoors.	1-2,5 kg 25 kg mortar	5	360	17,66	88,30

Waterproofing

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
HUMISTOP GREY	50452	Positive and negative pressure waterproofing mortar, with strong water repellent effect. Indoors and outdoors. Suitable for drinking water tanks acc. R.D. 3/2023. Certificate UNE EN 1504-2.	1,45-1,6 kg/m ² /mm	25	1125	1,66	41,50
HUMISTOP WHITE	50450			25	1125	1,76	44,00
HUMISTOP FLEX	50453	Liquid additive for Humistop. Increases mortar flexibility and adhesion.	10 L / 25 kg Humistop	10	330	8,28	82,80
HUMISTOP FLEX 1C	46054	One-component elastic cementitious membrane for waterproofing all types of porous ceramic or cementitious substrates. Certified EN 1504-2 – Surface protection systems for concrete.	Brush application: Approx. 1,01 kg/m ² ·mm. Trowel application: Approx 1,08 kg/m ² ·mm.	15	675	6,30	94,50
HUMISTOP HWO	50454	Cement based capillary crystalline waterproofing mortar for both positive and negative pressure. "Crystallizer" of mortar and concrete surfaces. Indoors and outdoors. Suitable for drinking water tanks. Resistant to salt water and atmospheric pollution. Certificate UNE EN 1504-2.	1,5-2,0 kg/m ²	25	1125	2,87	71,75
HUMISTOP PLUG	24356	Ultra-fast setting mortar for instant sealing of water leaks. Without shrinkage or cracking. Can be worked with the pipe loaded. Sets underwater.	1,5 kg/liter	5 (4 Ut/box) Minimum sale 1 box	540	3,53	70,60
HUMISTOP WP170	Depending on the colour	Water-based aliphatic polyurethane coating for waterproofing, visitable and walkable roofings. (Available colors: WHITE, GREY and RED). Tested and classified according to ETAG 005.	1,5 - 3,5 kg/m ² (depending on application type)	6	432	12,80	76,80
				20	480	11,92	238,40
ARDEX 8+9	50495	Two-component flexible waterproofing membrane. Solvent free. Applicable by trowel or roller. Recoatable after 2 hours. Indoors and outdoors. Certificate EN 14891: CM O2P. EC1Plus Very low emissions. Mix ratio Ardex 8 : Ardex 9 roller consistency 1:1 / trowel consistency 1:1,5	For roller application: (2 coats, 0,8 mm dry thickness): 0,50 kg ARDEX 8 + 0,50 kg ARDEX 9 = 1,00 kg of mix	Ardex 8 5 kg	360	16,34	81,70
	50559			Ardex 9 5 kg	540	4,63	23,15
	–			Kit 8+9 - 5 kg		10,49	104,85
	50494			Ardex 8 20 kg	320	14,13	282,60
	50492			Ardex 9 20 kg	1000	4,08	81,60
	–			Kit 8+9 - 20 kg		9,11	364,20
ARDEX 7+8	58138	Super sealing compound for ARDEX SK 100 W installation, ceramics, porcelain, low thickness porcelanic tiles. Waterproofing membrane in interior and exterior, swimming pools, balconies and terraces together with ARDEX SK 100 W. Certified EN 12004: C2 FE S2. EC1Plus very low emissions.	1 kg/m ² mixture with trowel 3x3x3	ARDEX 7 5 kg	1040	5,07	25,35
	50495			ARDEX 8 5 kg	360	16,34	81,70
ADIMESH 21	50422	Flexible fiberglass mesh. Reinforcement of joints, cracks, in waterproofing, coatings, etc. Reinforcement in preparation of surfaces with epoxy primer. Mesh size = 2 mm.	—	Roll 1x50 m 4 kg	54 uts.	110,37	110,37
ADIMESH 55	50421	Flexible fiberglass mesh. Reinforcement of joints, cracks, in waterproofing, renders, etc. Mesh size = 5mm.	—	Roll 1x50 m 4 kg	48 uts.	99,34	99,34

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX SK100W	70293	TRICOM waterproofing membrane. Sealing of wall and floor areas in interiors and exteriors, swimming pools, balconies, and terraces, prior to the installation of tiles and slabs. Bridges cracks. To be used with ARDX 7+8 adhesive. Alkali-resistant. Complies with the European standard ETAG 022-2:ETA-11/0282. EC1Plus very low emissions.	—	Roll 30 m' 9 kg	24	474,62 Roll	474,62 Roll
ARDEX SK12	61112	TRIKOM reinforcing geotextile for waterproofing. High strength. Waterproof. 12 cm-wide band. Bridges cracks. To be used in combination with ARDEX 8+9. Alkali-resistant. EC1Plus very low emissions.	—	Roll 10 m	500 Uts.	44,15 Rollo	44,15 Roll
	61111		—	Roll 50 m	100 Uts.	135,76 Roll	135,76 Roll
ARDEX FPO S DT	46316	Waterproof band based on FPO (Flexible Polyolefin) with high elongation and strength. For treatment of movement joints, wall-to-floor connections subjected to high stresses and permanent water pressure. Suitable for drinking water tanks. Weather-resistant, suitable for external climatic conditions and aggressive environments. High mechanical, chemical, and elastic resistance. Tear- and puncture-resistant. Easy to repair.	—	Roll 20 m	15 Uts.	299,42	299,42
PROTECER I-10	50386	Water- and oil-repellent impregnation for ceramics, porous mortars, and natural stone. Does not alter the color or the original appearance of the substrate.	0,05 - 0,20 L/m ² and layer (depending on the substrate)	5 L	360 L	25,94	129,70
PROTECER W120	50472	Colorless water-based water repellent for protection of porous surfaces. Breathable. Resistant to alkaline pH. Does not yellow or alter the color or original appearance of the substrate.	0,15 - 0,4 L/m ² (depending on the substrate)	5 L	360 L	7,38	36,90
	50473			25 L	600 L	6,96	174,00
PROTECER IC	45720	Corrosion-inhibiting impregnation for protecting reinforced concrete structures against corrosion attack. Highly reactive and resistant to alkalinity, re-passivates reinforcements, excellent penetration capability. Hydrophobic, reduces water and chloride ion absorption. Protects concrete according to principles 1, 2, 8, and 11 of standard UNE EN 1504-9.	Approx. 0,45-0,65 kg/m ² (depending on the substrate)	205 L	820 L	72,71	14905,55
	46389			25 L	600 L	72,71	1817,75
	47352			5 L	360 L	79,21	396,05
ISOLCAP FEIN 300	50682	Light and heat-insulating prepared mortar for making screeds for direct laying of ceramic tiles, textile floors, floating parquet floors, etc.	13-14 sacs/m ³ of mortar ready to use	70 L	48 sacs	40,84	40,84

Tile Adhesives

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX 4x4 CREAM	41956 White	White creamy consistency adhesive for ceramic tiles. Installation of ceramic, stoneware or porcelain tiles and moisture-insensitive natural stone. Indoors and outdoors. Long installation time. Resistant to water and frost. Certified EN12004 and EN 12002: C2TES1.	1,2 kg/m ² mm	25	1125	1,18	29,50
ARDEX 4X4	32093 Grey	Creamy, adjustable-consistency tile adhesive for wall and floor coverings. Flexible and deformable. For installation of tiles, ceramic slabs, stoneware, porcelain stoneware, and natural stone not sensitive to moisture. Extended open time (30 minutes). Certificado según la norma EN 12004 y 12002: C2TES1.	1,2 kg/m ² mm	25	1125	1,05	26,25
ARDEX 4x4 FAST	46976	Fast-setting adhesive with creamy, adjustable consistency in thin layer for ceramic coverings in interior and exterior applications. For the installation of tiles, ceramic slabs, stoneware, porcelain stoneware, and natural stone not sensitive to moisture. Flexible and deformable. Extended application time (30 minutes). Certified according to EN 12004 and EN 12002: C2FTES1.	1,4 kg/m ² mm	25	1125	1,55	38,75
ARDEX X7G FLEX	50484	High workability flexible adhesive tile, suitable for low porous materials. Grey. Indoors and outdoors use. Certificate acc. EN 12004: C2 TE S1. EC1 Very low emissions. Fire performance A1.	1,14 kg/m ² mm	25	1125	1,20	30,00
ARDEX X7W	50483	High workability flexible adhesive tile, suitable for low porous materials. White. Indoors and outdoors use. Certificate acc. EN 12004: C2 TE S1. EC1 Very low emissions.	1,14 kg/m ² mm	25	1125	1,39	34,75
ARDEX X7W PLUS	50482	Special high-resistance flexible adhesive tile resistant to water and frost. Deformable and waterproof. Very high resistance to traction, compression and flexotraction. Improves performance by 30%. White. Certificate acc. EN 12004: C2 TE S1. EC1 Very low emissions.	1,01 kg/m ² mm	25	1125	1,54	38,50
COLAFIX 8x8 Grey	37059	Highly deformable S2 super adhesive tile. For laying and joining ceramic tiles, porcelain tiles, artificial stone and moisture-resistant natural stone tiles. Interior and exterior. Specially for laying large, thin ceramic tiles. Certified EN 12004: C2 TE S2.	1,0 kg/m ² mm	25	1125	2,00	50,00
ARDEX S22	50478	Flexible adhesive tile for medium and thick bed installation methods with Ardurapid® Effect. For laying natural stone without stains. Installation of stoneware, porcelain and ceramic tiles, concrete tiles and engineered stones. Levelling of floor and wall areas. Walkable after 3 hours. Applied in thicknesses from 5 to 20 mm. Grey. Indoors use. Certificate EN 12004: C2 FT S1. Fire class A1.	1,20 kg/m ² mm	25	1125	2,32	58,00

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX N23W	19852	Microtec® and Ardurapid® flexible adhesive tile. For thin or medium bed natural stone installation without stains and construction materials. White, indoors use. Certificate acc. EN 12004: C2 FTE S1. EC1Plus Very low emissions.	1,04 kg/m ² mm	25	1125	3,20	80,00
ARDEX X32	50563	Flexible adhesive tile for medium and thick layers. Laying of natural stone without stains, all kinds of materials. With Ardurapid® Plus Effect. Indoors and outdoors use. Certificate EN 12004: C2 FTE S1.	1,20 kg/m ² mm	25	1125	4,20	105,00
ARDEX X80	46505	Versatile thin and medium bed adhesive tile due to variable consistency adjustment. Indoor and outdoor walls and floors. Long working time, especially suitable for large format tile installation. With MICROTEC® fibre technology. Certified EN 12004: C2 TE S1. EC1plus Very low emissions. Fire performance class A2-s1;d0.	1,13 kg/m ² mm	25	1000	2,00	50,00
ARDEX X80S	42151	Flexible adhesive tile with Microtec® technology, for installation of tiles and natural stone in thin or medium layers, thanks to variable consistency adjustment. Suitable for walls and floors, indoors and outdoors. Extended working time, walkable after 90 minutes. Certified EN 12004: C2 FTE S1. EC1plus Very low emissions.	1,4 kg/m ² mm	15	960	4,83	72,45
ARDEX WA ADHESIVO	60401	Epoxy resin adhesive tile highly resistant to chemical attack. Easy to clean and apply. Certificate acc. EN 12004: R2T. EC1 Very low emissions.	1,50 kg/m ² mm	4	360	17,66	70,64
ARDEX PMO 560	45498	Polyurethane reaction resin adhesive for use in shipbuilding and the precast sector. Installation of all types of tiles on difficult substrates (steel, polyester FRP, and wood). Suitable for substrates sensitive to moisture and highly deformable. High flexibility and adhesive strength. Walkable after 6 hours, groutable after 12 hours. Indoors, outdoors. Certified according to EN 12004 R2T. EC1 Plus, very low emissions. GISCODE RU1.	(On smooth substrate using a 6 mm trowel 3,0 kg/m ² mm	6	360	11,09	66,54
DESINCRUSTADOR ADI 90	50398	Leaching liquid for cleaning cement residues, waste, and efflorescences in general. For exterior and interior use.	Depending on the conditions of the substrate	5	360	5,36	26,80
ARDEX E 90	59120	Concentrated acrylic dispersion to increase adhesion and flexibility of adhesives. Maximises safety in the laying of large format tiles on facades.	3,3-4,5 kg/25 kg	4,5	324	17,22	77,49

Tile Grouts & Silicones

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX BS	According to color	Universal grout mortar for sealing joints from 2 to 20 mm. Walkable after 5 hours. Exterior and interior use. Available colors in 5 kg: White, Beige, Cement Grey, Light Brown, Anthracite, Jasmine, Light Grey. Available colors in 12.5 kg: Cement Grey. Complies with standard EN 13888 CG2 WA.	According to joint. Density when wet 2 kg/L	5 (4 Ut/box) Minimum sale 1 box	540	2,10	42,00
	According to color			12,5	1000	1,82	22,75
ARDEX FS FLEX	According to color	Flexible mortar for grouting joints from 1 to 6 mm. Available colors in 5 kg: White, Beige, Silver Grey, Cement Grey, Light Brown, Anthracite, Black, Jurabeige, Jasmine, Light Grey, Teka Brown, Mist White, Pergamon Smoke, Sand, Arizona, Silk Grey Available colors in 12.5 kg: White Beige, Silver Grey, Cement Grey, Anthracite, Jasmine, Light Grey. Complies with standard EN 13888 CG2 WA.	According to joint. Density when wet 1.8 kg/L	5 (4 Ut/box) Minimum sale 1 box	540	2,59	51,80
	According to color			12,5	1000	2,38	29,75
ARDEX G9S FLEX	19553 Cement Grey	Fast-setting flexible mortar for joints from 2 to 15 mm. Classified according to EN 13888: CG2WA. Very low emissions, EMICODE EC1 Plus.	According to joint. Density when wet 2.1 kg/L	12,5	1000	3,64	45,50
	19555 Basalt			12,5	1000	3,64	45,50
	19547 Grey			12,5	1000	3,64	45,50
ARDEX JK Particularly suitable for swimming-pools	41329	Rapid mortar for grouting joints from 1 to 8 mm. Particularly suitable for swimming-pools. Walkable after 90 minutes. White color. Complies with EN 13888 standard: CG2 WA.	According to joint. Density when wet 2.1 kg/L	5 (4 Ut/box) Minimum sale 1 box	540	3,10	62,00
	50534			25	1125	2,92	73,00
Epoxy based							
PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX WA JUNTA	According to color	Epoxy resin for grouting joints from 2 to 15 mm. Very resistant to chemical attacks. Very easy to clean, does not require hot water. For floors and walls. Colours: White, and Grey. Special colours upon request. Complies with EN 13888 RG. EC1 Very low emissions.	According to joint. Density when wet 1.5 kg/L	4	360	18,21	72,84

*Consommation pour un joint de section 1x1 cm.

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX ST	According to color	Silicone sealing for natural stone. Interior and exterior use. Colours: Weiss, Silbergrau, Steingrau, Anthrazit, Sandbeige, Jurabeige. Certified according to EN 15651-1/3/4.	1,0 g/cm ³	Cartridge 310 ml	12 (4 Ut boxes) Minimum sale 1 box	15,89	190,68
ARDEX SE 12 ut box	According to color	Sanitary silicone, indoors and outdoors use. Colours: Transparent, Brilliantweiss, Pergamon, Zementgrau, Sandgrau, Anthrazit, Jasmin, Bahamabeige, Sandbeige, Graubraun, Jurabeige, Dunkelbraun, Balibraun, Steingrau. According to EN 15651-1/3/4.	1,0 g/cm ³	Cartridge 310 ml	12 (4 Ut boxes) Minimum sale 1 box	14,35	172,20
ARDEX SE 20 ut box	According to color	Sanitary silicone. Indoors and outdoors use. Colours: Weiss, Silbergrau, Hell Grau, Grau, Basalt. Certified according to EN 15651-1/3/4.	1,0 g/cm ³	Cartridge 310 ml	20 (4 Ut boxes) Minimum sale 1 box	14,35	287,00
ARDEX SC-MATT	According to color	Mat silicone sealant with fungicidal finish (curing by acetic acid). Elastic sealing of expansion joints, edges, and connection joints in interior and exterior applications. MATT. Outdoor and indoor use. Colours: Anthrazit, Basalt, Grau, Sandgrau, Zementgrau. Certified according to EN 15651-1/3/4.	1,0 g/cm ³	Cartridge 310 ml	12 (4 Ut boxes) Minimum sale 1 box	20,56	246,72
ARDIFLEX GRIS	50408	One-component, elastic polyurethane sealant . Reacts with ambient humidity. •For joints of 5 x 10 mm section.	130 g per lineal meter•	Cartridge 600 ml	20 (4 Ut boxes) Minimum sale 1 box	11,37	227,40
ARDEX CA 20P	73129	One component, silane modified polymer adhesive and neutral curing sealant which hardens in reaction with moisture. Mono-component. Solvent free. Interior and exterior use. EC1Plus Very low emission.	30-40 ml per lineal meter•	Cartridge 310 ml	12 (4 Ut boxes) Minimum sale 1 box	18,21	218,52
ARDEX RG Cleaner	24590	Cleaner particularly suitable to remove residues after application of epoxy joints. Suitable for both final cleaning and cleaning before installation of ARDEX products.	Manual washing: 100-200 ml / 10 l water Mechanical washing: 300-400 ml / 10 l water	1 L	400	23,74	23,74

Plasters & Renders

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX W 820 Super finish	24399	Polymer-modified plaster for manual or spray application. Suitable for filling, finishing and as plasterboard adhesive. Layer thicknesses from 0 to 20 mm. High workability. High filling capacity. Easy sanding. Certificate: EN 13963:4B y EN 13279-1:C6/20/2. Fire performance A1. EC1plus very low emission.	0,9-1,0 kg/m ² /mm	5 (4 Ut boxes) Minimum sale 1 box	540	2,10	42,00
	25919			15	900	1,87	28,05
ARDEX A 828 LEMON	50560	Joint filler putty without tape. Applicable in any thickness. Does not crack or fissure. Suitable for plastering, filling, and bonding paste. Surface finish quality levels Q1–Q4. With lemon fragrance. Certificate EN 13963:4B. Fire performance A1. EC1plus very low emission.	1,0 kg/m ² /mm	5 (4 Ut boxes) Minimum sale 1 box	540	2,76	55,20
	50561			15	900	2,54	38,10
ARDEX W600	50590	Wall repair compound for smooth and textured finishes (smooth finishes, textured coatings, stippled finishes, etc.). Applicable in thin and thick layers with minimal shrinkage. Does not crack or fissure. For interior use. Long open time.	1,0 kg/m ² /mm	15	900	1,54	23,10
ARDEX R1	53171	White cementitious wall and ceiling renovation plaster. Suitable for filling cracks and holes, plastering and smoothing surfaces. Adheres to all types of surfaces. Indoors use. With Ardurapid® effect. EC1Plus very low emission.	0,8 kg/m ² /mm	25	1000	5,18	129,50
ARDEX F11	50490	Fine coat finishing render for walls and facades. Filling cracks and holes. Without tensions. White. Indoors and outdoors use. Certificate EN 1504-3:R1. EC1Plus very low emission.	1,2 kg/m ² /mm	25	1125	2,76	69,00
ARDEX F5	37629	Fine white mortar for filling vertical substrates in thin, medium and thick layers. Indoors and outdoors use. Crack-free. Fibers-reinforced Microtec® Technology. Deformable. Ardurapid® Plus effect. Certificate EN 998-1: GP-CS IV-W2. EC1Plus very low emission.	0,9 kg/m ² /mm	5 (4 Ut boxes) Minimum sale 1 box	540	6,52	130,40
	50592			15	900	6,18	92,70
ARDEX B12	50501	Cosmetic repair mortar for filling and leveling irregularities. Smoothing of walls and concrete finishes. Layer thickness up to 5 mm. For exterior and interior use. Grey color. Certificate EN 1504-3:R1. EC1Plus very low emission.	1,2 kg/m ² /mm	25	1125	2,65	66,25
REVOPLAST	50465	White façade mortar for leveling and decorative finishes (sgraffito, stucco, scraped, swirl), suitable for interior and exterior applications. EN 998-1 certified: GP-CS IV-W2. Fire behavior A1.	1,4 kg/m ² /mm	25	1125	1,05	26,25
ARDEX R4 RAPID	23006	Fine white repair mortar for interior use, designed for surface renovation and filling defects up to medium depth. Excellent adhesion to all substrates, fast drying in 60 minutes. Ardurapid® effect. EC1Plus very low emission.	1,1 kg/m ² /mm	2,5	275	12,59	31,48
ARDEX RF	32419	Fast-drying flexible acrylic putty, paintable in 45–60 minutes, ideal for crack and hole filling up to 12 mm, with excellent adhesion and no shrinkage. Suitable for interior and exterior walls and ceilings. EC1 Plus certified for very low emissions.	According to filling volume	310	1200	6,83	6,83

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ARDEX R70PE	8005992	PU cement mortar, high resistance. Thickness of 3 to 5 mm. Without joints: allows easy cleaning, maintaining a high level of hygiene. Available colours: Grey / Green / Red / Cream / Blue. Certificate acc. to EN 13813: CT AR0.5 IR24.5 B2.0. Fire performance BflS1.	2,0 - 2,25 kg/m ² /mm	21,53 pack	70 packs = 2 Palets	7,01	150,93
ARDEX R90P	8005256	Very high resistance PU cement mortar. Thickness from 5 to 9 mm. Resistant to a wide variety of chemical products and liquids. Resistant to thermal shock. Available colours: Green / Grey / Red / Cream / Blue. Certificate EN 13813: CT AR0.5 IR39 B2.0. Fire performance BflS1.	2,64 - 2,75 kg/m ² /mm	28,93 pack	80 packs = 3 Palets	6,66	192,67
ARDEX PRIMER E	8004003	Multifunctional primer. 100% solids. Good adhesion on dry porous substrates.	200-300 g/m ² /layer	20	20 packs = 2 Palets	20,30	406,00
ARDEX R40E Group 1 colors	8004471	Epoxy coating, 100% solids. Solvent free. High thickness. High physical and chemical resistance. Certificate EN 13813: SR-AR0.5-IR14-B2.0. Emission-free (Class A+ for indoor air emissions).	250-1000 g/m ² /layer (depending on the application type)	25	20 packs = 1 Palet	21,10	527,50
ARDEX R40E Group 2 colors	8004471		22,83	570,75			
ARDEX R50ES Group 1 colors	8004041	Epoxy coating, 100% solids. Multipurpose. Especially formulated for universal application (paint, multilayer or self-leveling). Certificate EN 13813: SR-AR0.5-IR14-B2.0.	250-1000 g/m ² /layer (depending on the application type)	25	20 packs = 1 Palet	17,67	441,75
ARDEX R50ES Group 2 colors	8004041		19,39	484,75			
ARDEX R15P	8005639	Polyurethane cement renovation coating for repair and restoration of polyurethane cement flooring. Available colours: Green, Grey, Red, Cream.	180-1200 g/m ² (depending on the application type)	9,63	72 packs = 2 Palets	16,36	157,55
ARDEX R15P AB+	8005900	Colored polyurethane-cement bacteriostatic coating. Maximum protective effect. Prevents adhesion, inhibits proliferation, and avoids the spread of a wide spectrum of pathogenic organisms. Applicable in combination with other polyurethane-cement mortars. Available colors: green, grey, red, cream.	180-1200 g/m ² (depending on the application type)	9,83	72 packs = 2 Palets	22,03	216,55
ARDEX R6E	8004478	Epoxy primer resistant to contamination by grease and oils.	250 g/m ² /layer	8	24 packs = 1 Palet	42,22	337,76
ARDEX DGR	18480	Degreasing cleaner with high anti-grease action. Ideal for use together with and prior to the use of the ARDEX R6E oil tolerant primer. Can be used on wet surfaces, as well as for cleaning brushes, machinery, etc.	(depending on conditions substrate)	4,5 L	—	22,59	101,66
ARDEX RTC Tool Cleaner	18429	Resin cleaner (epoxy, polyurethane, etc.), biodegradable, low toxicity.	—	5	96 u.	18,58	92,90
ARDEX R65P	8001737	Two components water-based aliphatic polyurethane sealer. Interior and exterior use. Extra matt appearance. High performance. Applicable on walls and floors.	100 g/m ² /layer	3,3	68 u.	54,83	180,94
ADI COAT PRIMER	50698	Acrylic primer for decorative mortars. Used prior to the application of ARDEX water-based polyurethane varnishes. For walls and floors. High water resistance. Solvent-free. Low emission level.	100-200 g/cm ² /layer	5	360	9,97	49,85

Structural Reinforcement

PRODUCT	Article Code	DESCRIPTION	ESTIMATED CONSUMPTION	Packaging (kg/u.)	PALLETS (kg/u.)	€/kg	€/Package
ADICARBON 240 200 gr/m ²	45233		-		-	57,18	57,18
ADICARBON 240 300 gr/m ²	45234	High-strength unidirectional carbon fiber fabric for structural reinforcement of construction elements, applicable by dry or wet lay-up with ADIPOX EP55 resin.	-	1 Roll 0,3x100=30 m ²	-	63,98	63,98
ADICARBON 240 400 gr/m ²	45235		-		-	76,44	76,44
ADICARBON 240 600 gr/m ²	45236		-		-	105,85	105,85
ADIPOX EP55	45288		High-performance two-component epoxy resin. Formulated with a polyamide hardener developed for bonding ADICARBON 240 carbon fiber fabrics. Solvent-free.		Approx. 1.15 kg/m ² /mm	Kit 6 kg	252
ADITAPE 150 Rolls de 50	50/1.2	Polymeric laminates obtained by pultrusion of unidirectional carbon fiber and polymers. Structural reinforcement of concrete, masonry, or steel structures. Bonded to the substrate as an external reinforcement element using ADIPOX EP220.	-	1 Roll of 50 m	-	28,49	28,49
	50/1.4		-		-	30,31	30,31
	60/1.4		-		-	37,03	37,03
	80/1.2		-		-	46,45	46,45
	80/1.4		-		-	50,61	50,61
	90/1.4		-		-	54,19	54,19
	100/1.2		-		-	52,57	52,57
	100/1.4		-		-	56,19	56,19
	120/1.2		-		-	57,54	57,54
	120/1.4		-		-	64,14	64,14
	150/1.2		-		-	74,03	74,03
150/1.4	-	-	77,35	77,35			
ADITAPE 200 Rolls de 100/150m	50/1.4	Polymeric laminates obtained by pultrusion of unidirectional carbon fiber and polymers. Structural reinforcement of concrete, masonry, or steel structures. Bonded to the substrate as an external reinforcement element using ADIPOX EP220.	-	1 Roll de 100 o 150 m	-	53,74	53,74
	60/1.4		-		-	57,43	57,43
	80/1.4		-		-	76,17	76,17
	100/1.4		-		-	91,35	91,35
	120/1.4		-		-	107,56	107,56
ADIPOX EP220	45287	Grey, solvent-free, thixotropic two-component epoxy resin adhesive, developed for bonding ADITAPE 150 and ADITAPE 200 carbon fiber laminates. Fresh and cured properties tailored to meet structural reinforcement system requirements. Mechanical strengths achieved after 24 hours at +18 to +20 °C.	Approx. 1.6 kg/m ² /mm	Kit 15 kg	420	18,14	18,14

COLOUR CHART

The colours represented here are approximate and may differ from their actual appearance once applied. This colour chart is composed of two groups, divided into Group 1 and Group 2, consisting of 32 and 18 RAL colours respectively. Their prices are shown in this price list and identified as Group 1 colours and Group 2 colours.

The colours belonging to Group 2 are subject to slight increase (already applied in the indicated price) – this is due to the increased costs of the pigments used for production.

Colours not included in these two groups are defined as GROUP 3. The price applicable to these colours is subject to assessment by the company's management based on the following factors: quantity, manufacturing availability and urgency.


As noted in the listings of some products, availability of colours is limited.

Colors and / or quantities not specified in the product description are not available. Please inquire us.

Colors RAL - Group 1



Colors RAL - Group 2

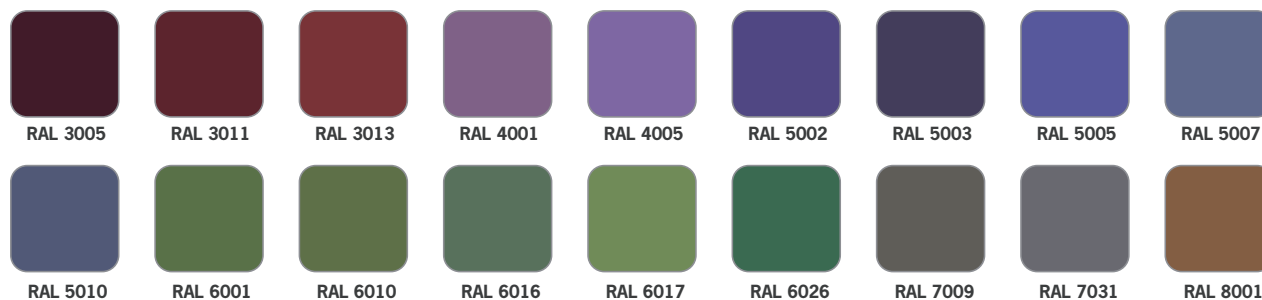



Seire

pANDOMO
AN ARDEX BRAND

wedi

Sicher besser.
GUTJAHR

wakol
Anspruch verbindet



ARDEX CEMENTO, S.A.

Certified ISO9001 Company

Factory, Head Offices and Warehouse:
Pol. Ind. Pla de Llerona - c/. Holanda, 18
08520 Les Franqueses del Vallès - Barcelona - España

Tel: +34 93 846 62 52

www.ardex.es - e-mail: ardex@ardex.es

For orders contact: export@ardex.es

